

Bump Turn Conveyor

Overview

Make your equipment more versatile with Streamfeeder's Bump Turn. It runs either as a stand-alone unit or in-line with inkjets, tabbers, folders, stitchers, trimmers and more. Features include angle adjustments, left and right bump turning, variable speed, and multi-bump positioning.

The Bump Turn takes material as it is originally presented and rotates product 90 degrees either right or left at speeds up to 30,000 pieces per hour. Add a second Bump Turn unit to rotate product 180 degrees.

Features and Benefits

- Runs up to 30,000 pieces/hour
- Left or right bump option
- Adjustable multi-bump pin positioning
- Fast, simple integration
- Runs in-line with inkjets, tabbers, folders, stitchers/trimmers and more




Bump Turn's pre-bump pin starts transition.

Piece makes contact with first marble located on control rack which pulls the piece smoothly.

Bump Turn belt helps continue turning the product.

Once in position, the product is ready for ink jet or tabber.

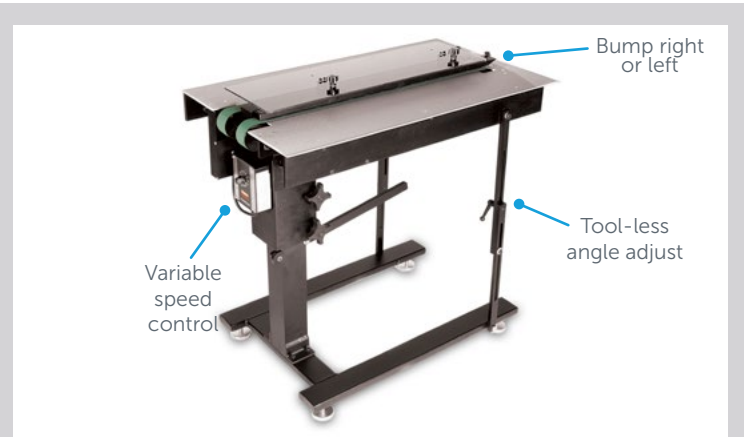

Specifications

Maximum Input Height

35" (89 cm)

Minimum Input Height

21" (53.34 cm)

Maximum Output Height

35" (89 cm)

Minimum Output Height

32" (81.28 cm)

Maximum Product Thickness

.125" (3.175 mm)

Maximum Product Size

12" long x 14" wide (305 x 357 mm)

Speed

20 to 500 ft./min. (51 to 1270 cm/min.)

Utilities

120vac, 60Hz, 3A

Product Dimensions

19.5" wide x 35.25" long x 33.25" high

Weight

49.5 lbs. (22.45 kg)

Other sizes and thickness capabilities available.

Contact our experienced sales team today for a comprehensive review of your application/product and see how our Bump Turn Conveyor can benefit your company.

Hayssen | Rose Forgrove | Sandiacre | Schib | Simionato | Streamfeeder | Symach | Thiele

Streamfeeder - BW Flexible Systems

315 27th Avenue Northeast | Minneapolis, MN 55418 USA

+1 (763) 502-0000 Streamfeeder.com

2022.02

barrywehmiller
bw
betterworld