IT-2400 Friction Feeder

Wi-Fi

Overview

Streamfeeder's IT-2400 easily integrates to a variety of host and control systems such as cartoners, case erectors, wrappers, WMS and more. Feed a wide variety of flat and multi-thickness products. Operates on-demand, one at a time or batched sets, and continuous feed mode.

Wi-Fi enabled controls allow you to set-up and adjust the IT-2400 on-the-fly from an application on your phone, tablet or laptop. Management, operators, and maintenance can view real-time diagnostics and reports allowing them to track productivity, quality and efficiencies.

Standard Features

- I/O interface
- Miss-detect
- Photo-sensor trigger
- Rubber feed belts
- Self-triggering
- Timeout stop
- Trigger delay
- Vacuum assist
- HMI touch screen
- Real time data display
- Job library
- Programmable job size
- Maintenance schedules with alerts
- Report output
- Stainless steel construction

Optional Features

- Adjustable discharge
- Double sheet detect
- Low stack detect
- Speed matching
- Powered rotating gate
- Tower lamp
- Vacuum Transport
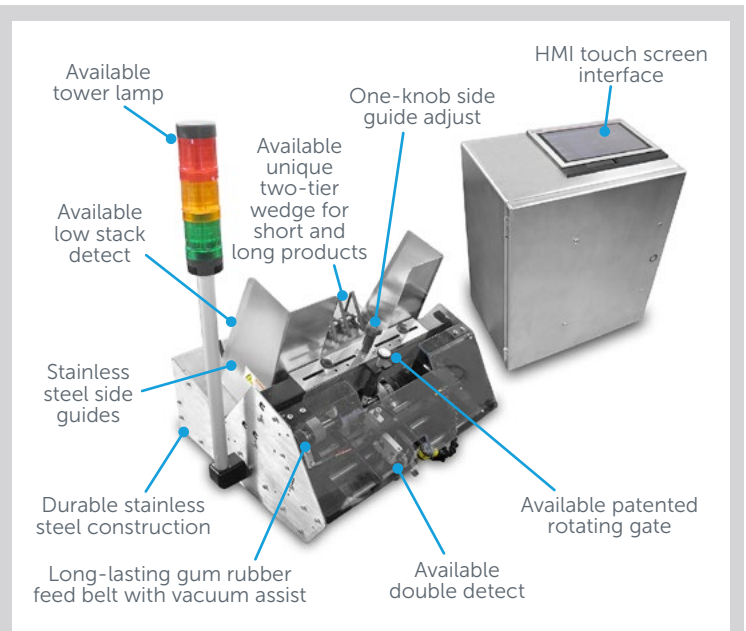- Vertical Discharge

Applications

- Batch Counting
- Cartoners
- Case Packers
- Collators
- Envelope Inserters
- Flow Wrappers
- Order Fulfillment
- Poly Baggers
- Shrink Wrappers
- Vertical Baggers

Products

- Booklets
- Brochures
- Cardstock
- Collapsed Cartons
- Envelopes
- Folded Documents
- Product Inserts
- Sheet Paper

Contact our experienced sales team today for a comprehensive review of your application/product and see how our IT-2400 can benefit your company.

Available tower lamp
Available low stack detect
Stainless steel side guides
Durable stainless steel construction
Long-lasting gum rubber feed belt with vacuum assist
Available unique two-tier wedge for short and long products
One-knob side guide adjust
HMI touch screen interface
Available double detect
Available patented rotating gate

Specifications	
Maximum Product Size 24" wide x 14" long (609 x 357 mm)*	
Minimum Product Size 4" wide x 2.5" long (101.6 x 64 mm)*	
Min/Max Product Thickness .003" to 1.0" (.076 to 25.4 mm)*	
Belt Speed 7,000 in/min (178 m/min)	
Batch Size 1-9,999	
Utilities 115/230vac, 50/60 Hz, 12/6A (configured)	
Weight Feeder: 60 lbs. (27.2 kg); Control Box: 36 lbs. (16.3 kg)	
Warranty One year limited	
*Other sizes and thickness capabilities available.	

Hayssen | Rose Forgrove | Sandiacre | Schib | Simionato | Streamfeeder | Symach | Thiele