# **IT-600 Friction Feeder**



#### Overview

Streamfeeder's IT-600 easily integrates to a variety of host and control systems such as cartoners, case erectors, wrappers, WMS and more. Feed a wide variety of flat and multi-thickness products. Operates ondemand, one at a time or batched sets, and continuous feed mode.

Wi-Fi enabled controls allow you to set-up and adjust the IT-600 on-the-fly from an application on your phone, tablet or laptop. Management, operators, and maintenance can view real-time diagnostics and reports allowing them to track productivity, quality and efficiencies

# **Standard Features**

- I/O interface
- Miss-detect
- Photo-sensor trigger
  Job library
- Rubber feed belts
- Self-triggering
- Timeout stop
- Trigger delay
- Vacuum assist

- HMI touch screen
- Real time data display
- Programmable job size
- Maintenance schedules with alerts
- Report output
- Stainless steel construction

# **Optional Features**

- Low stack detect
- Speed matching
- Tower lamp
- Double sheet detect
  Powered rotating gate
  - Small Product configuration
  - Vacuum Transport
  - Vertical Discharge


### **Applications**

- Batch Counting
- Cartoners
- Case Packers
- Collators
- Envelope Inserters
- Flow Wrappers
- Order Fulfillment
- Poly Baggers
- Shrink Wrappers
- Vertical Baggers

### **Products**

- Booklets
- Brochures
- Cardstock
- Collapsed Cartons
- Envelopes
- Folded Documents
- Product Inserts
- Sheet Paper

Contact our experienced sales team today for a comprehensive review of your application/product and see how our IT-600 can benefit your company.

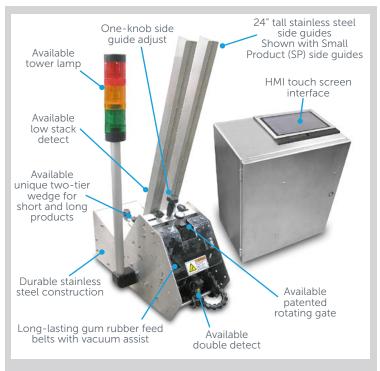

### **Specifications**

# Maximum Product Size

6" wide x 9" long (152 x 229 mm)\*

Small Product Configuration: 5 W x 5 L in (127 x 127 mm)°

#### Minimum Product Size

2" wide x 2.5" long (51 x 64 mm)\*

Small Product Configuration: 1 W x 1 L in (25.4 x 25.4 mm)

#### Min/Max Product Thickness

.003" to 1.0" (.076 to 25.4 mm)\*

#### Belt Speed

7,000 in/min (178 m/min)

#### Batch Size

1-9.999

#### Utilities

115/230vac, 50/60 Hz, 12/6A (configured)

Feeder: 45 lbs. (20.4 kg); Control Box: 36 lbs. (16.3 kg)

#### Warranty

One year limited

\*Other sizes and thickness capabilities available. \*Optional.

Hayssen | Rose Forgrove | Sandiacre | Schib | Simionato | Streamfeeder | Symach | Thiele

